



TOWABLE HYDRANT CART

WWW.GARSITE.COM

GARSITE



MATERIAL: ALUMINUM
SEPARATOR FILTER AND BETA REEL

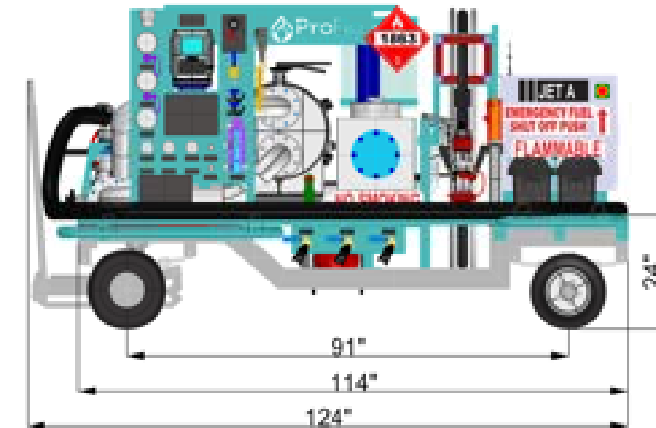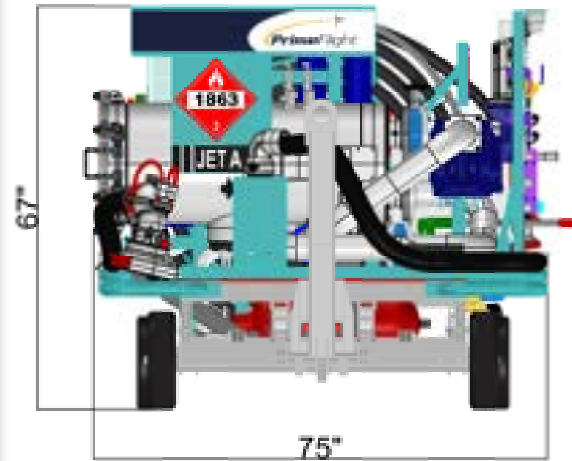

FEATURES

Chassis

- Airline Style 4 Wheel Cart

Fueling System - 450 GPM (1,700 LPM)

- 4" API Inlet Coupler.
- OPW Aluminum Inlet Swivel w/ Shutoff Valve
- 2,5" x 26' API Inlet Hose w/ Test Certificate
- Single-Wrap Hose Reel Constructed from Aluminum, Inlet Swivel and Manual Rewind
- Underwing Nozzle w/ 45-PSI HECV, 100-Mesh Strainer, Inlet Swivel, Dust Cap
- 2" x 50' API fueling Hose w/ Test Certificate
- Monitor Vessel W/Pressure Relief, Air Eliminator, in/out Millipore Fittings, Spring Loaded Drains
- TCS Meter w/ Electronic Register Head and Temperature Compensation
- Fuel/Fuel Control System
- Product Recovery Tank 20 Gallons w/ Depressurization System and EVAC System
- Stainless Steel Control Panel w/ Inlet Pit Pressure Gauge, Nozzle Pressure Gauge, Differential Pressure Gauge w/ High-DP Shutdown
- Manual Rewind Static Reel

Piping

- All Stainless Steel Piping
- Stainless Steel Tubing Routed for Sense and Drain Lines

Optional

- Separator Filter
- Modem for Wireless Data Transmission
- Fire Suppression System in Control Box
- Printer
- Toolbox

Also Included

- (2) 20Lb BC Fire Extinguishers w/ Brackets
- NFPA 407 and Logo Decals
- Operation and Maintenance Manual
- Emergency Shutoff Switches
- Solar Powered Electrical System

+1.419.436.6008

info@garsite.com